

# INTRODUCING THE **SELECT SERIES**

BY IMM BOAT LIFTS

- 10 Year Structural Warranty gives peace of mind
- Permanently Lubricated Pulley Bearings reduce user maintenance
- Maintenance Free no slip chain drive, the heavy duty choice in all large machinery
- Sealed Oil Bath Gear Reducer
- Weatherproof Motor provides extreme reliability
- Patented Wedge Lock cable attachment makes height adjustment easy
- Welded For Structural Integrity

**select  
series**



**imm  
BOATLIFTS**

For Our Nearest Dealer, Call Toll Free : (800) 669-3515  
To Learn More About Our Products, Please Visit Us On The Web @ [www.immboatlifts.com](http://www.immboatlifts.com)

Lift Capacity	A	B	C	Rec. Piling Sizes
4,500 lb	132"	120"	178.375"	8" dia.
7,000 lb.	144"	144"	203.625"	8" dia.
10,000 lb	144"	150"	208"	8" dia.
13,000 lb	144"	150"	208"	8" dia.
16,000 lb	144"	168"	221.25"	10" dia.
20,000 lb.	168"	192"	255.125"	10" dia.
27,000 lb.	192"	192"	271.50"	10" dia.
Capacity	A	B	C	D
32,000 lb.	84"	216"	231.75"	10" dia.




17030 Alico Center Rd.

Fort Myers, FL 33967

Tele: 239-454-7020 - Fax: 239-454-8641

Toll Free: 800-669-3515

\*IMM Boat Lifts will require information from the naval architect or boat builder to calculate correct spacing for dimension "D". Standard spacing for "D" is 288" unless we receive other information.

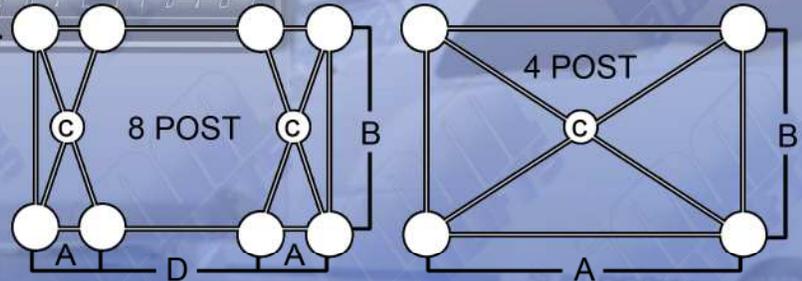

STANDARD	4500	7000	10000	13000	16000	20000	27000	32000
TOP BEAM CHANNEL SIZE	5" X 2.00"	6" X 2.00"	7" X 2.00"	8" X 2.00"	11" X 2.00"	11" X 2.00"	14" X 2.00"	11" X 2.00"
TOP BEAM OVERALL SIZE	5" X 8 3/8"	6" X 8 3/8"	7" X 8 3/8"	8" X 8 3/8"	11" X 8 3/8"	11" X 8 3/8"	14" X 8 3/8"	11" X 8 3/8"
NUMBER OF BEARINGS	10	10	10	10	10	10	10	20
GROOVED CABLE WINDER LENGTH	2 3/8" DIA. X 16" LONG	2 3/8" DIA. X 16" LONG	2 3/8" DIA. X 19" LONG	2 3/8" DIA. X 19" LONG	2 3/8" DIA. X 19" LONG	2 3/8" DIA. X 23" LONG	2 3/8" DIA. X 23" LONG	2 3/8" DIA. X 19" LONG
DRIVE SHAFT SIZE	1 15/16" O.D. GALV. PIPE							
CHAIN SIZE	# 50	# 50	# 50	# 50	# 60	# 60	# 60	# 60
DRIVE SHAFT SPROCKET	60 TOOTH	60 TOOTH	60 TOOTH	60 TOOTH	50 TOOTH	50 TOOTH	50 TOOTH	50 TOOTH
GEAR DRIVE SPROCKET	11 TOOTH	9 TOOTH	11 TOOTH	9 TOOTH	12 TOOTH	12 TOOTH	10 TOOTH	12 TOOTH
SEALED OIL BATH GEAR REDUCER	60:1	60:1	60:1	60:1	60:1	60:1	60:1	60:1
NO. OF MOTORS & HORSE POWER	(2) 3/4 H.P.	(2) 3/4 H.P.	(2) 3/4 H.P.	(2) 3/4 H.P.	(2) 1 H.P.	(2) 1 H.P.	(2) 1 H.P.	(4) 1 H.P.
MOTOR VOLTAGE & AMPS (PER MOTOR)	120 V 11.4 AMPS 240 V 5.7 AMPS	120 V 14.0 AMPS 240 V 7.0 AMPS						
CABLES	5/16" DIA. 20 FT 1 PART	5/16" DIA. 20 FT 1 PART	5/16" DIA. 33 FT 2 PART	5/16" DIA. 33 FT 2 PART	5/16" DIA. 33 FT 2 PART	5/16" DIA. 50 FT 3 PART	5/16" DIA. 50 FT 3 PART	5/16" DIA. 30 FT 4 PART
CABLE SPREAD	104"	116"	113"	113"	111"	127"	151"	24"
SPEED OF LIFT INCHES / MINUTE	40	32	20	16	26	17	14	22
GUIDE POST HEIGHT	7 FT.	7 FT.	7 FT.	7 FT.	10 FT.	10 FT.	10 FT.	10 FT.
BUNKS	2" x 8" x 12'	3" x 10" x 14'	3" x 10" x 16'	3" x 10" x 16'	KEEL BEAM WITH CUSTOM SUPPORTS			
PILING MOUNT BRACKETS	T-TYPE, SS, ADJUSTABLE							
BOTTOM BEAM SIZE (2X)	6" x 4" I-BEAM X 120" LG.	6" x 4" I-BEAM X 144" LG.	8" x 5" I-BEAM X 150" LG.	8" x 5" I-BEAM X 150" LG.	10" x 6" I-BEAM X 168" LG.	12" x 7" L I-BEAM X 192" LG.	12" x 7" H I-BEAM X 192" LG.	12" x 7" L I-BEAM x 216" LG.

For Our Nearest Dealer, Call Toll Free : (800) 669-3515

To Learn More About Our Products, Please Visit Us On The Web @ [www.immboatlifts.com](http://www.immboatlifts.com)